


PTFE (TEFLON HOSE)

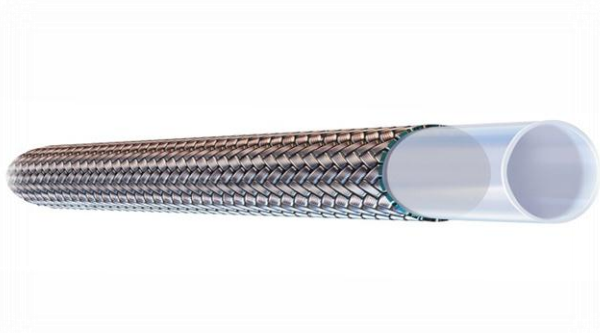

Polytetrafluoroethylene (PTFE) is an engineered fluoropolymer. Outstanding resistance to chemicals is one of its primary attributes. A broad temperature range of -100°F to 500°F (-73°C to 260°C) make this hose material suitable for the majority of fluid and ambient temperature conditions found in industry.

Part No.	Nominal ID	Wall Thickness	Noninal OD	Working Pressure	Burst Pressure	Min. Bend Radius	UOM
	mm	mm		BAR		mm	
3/16"	5.10	0.90	8.05	264	793	64	Meter
1/4"	6.70	0.75	9.34	224	672	76	Meter
5/16"	8.40	0.65	11.05	207	621	102	Meter
3/8"	10.30	0.65	13.40	183	552	127	Meter
1/2"	13.40	0.90	16.60	161	483	152	Meter
5/8"	16.60	0.90	19.85	114	345	178	Meter
3/4"	19.80	1.00	23.15	103	310	203	Meter
7/8"	22.10	1.00	25.35	92	276	229	Meter
1"	26.10	1.20	29.75	80	241	305	Meter